

Upright Cabinets

STG2RRI-2S-HC

 Roll-In Solid Swing Door Refrigerator with Hydrocarbon/R290 Refrigerant



Dimensions	
External Width (mm)	1727
External Depth (mm)	878
External Height (mm)	2130
Exclusions	Depth does not include 38 mm for door handle.
Net Volume (Litres)	-
Gross Volume (Litres)	2159
Internal Net Height (mm)	1711
Unpackaged Weight (kg)	301
Packaged Weight (kg)	313
Packaged Dimensions (W x D x H mm)	1880 x 1093 x 2286
Supplied with	One (1) heavy gauge stainless steel ramp.

Build	
Door Description	2-Solid Swing Doors with Positive Seal Self-Closing and 120° Stay Open Features
Exterior Construction	Stainless steel door, with matching aluminum sides.
Interior Construction	Aluminum side walls & back. Stainless steel floor & ceiling.
Air Intake Position	Front
Ventilation Position	Front
Clearance Required	26 mm rear and sides
Cord Length (Meters)	2.74
Internal Lighting	LED
Standard w/ Locks	Standard

Technical	
Temperature Range	0.5 : 3.3°C
Refrigerant	R290
Voltage/Frequency/Phase	230V/50Hz
Amps	4.7
Climate Class	-
Operating Statement	-
Test Standard	-
EEC	-
Energy Efficiency Index	-
Defrost Type	Auto
Energy Consumption (kWh/24h)	-
Energy Consumption (kWh/Annum)	-



Specifications subject to change without notice.

Chart dimensions rounded up to the next whole millimeter (inches rounded up to the 1/8")

UK & Ireland
EMEA
Australia


0800 783 2049
[+61 61 563 07 05](tel:+61615630705)
[+61 2 9619 9999](tel:+61296199999)

TFIUK@truemfg.com
TrueCHCustomerService@truemfg.com
TrueRefAus@truemfg.com



STG2RRI-2S-HC

 Roll-In Solid Swing Door Refrigerator with Hydrocarbon/R290 Refrigerant

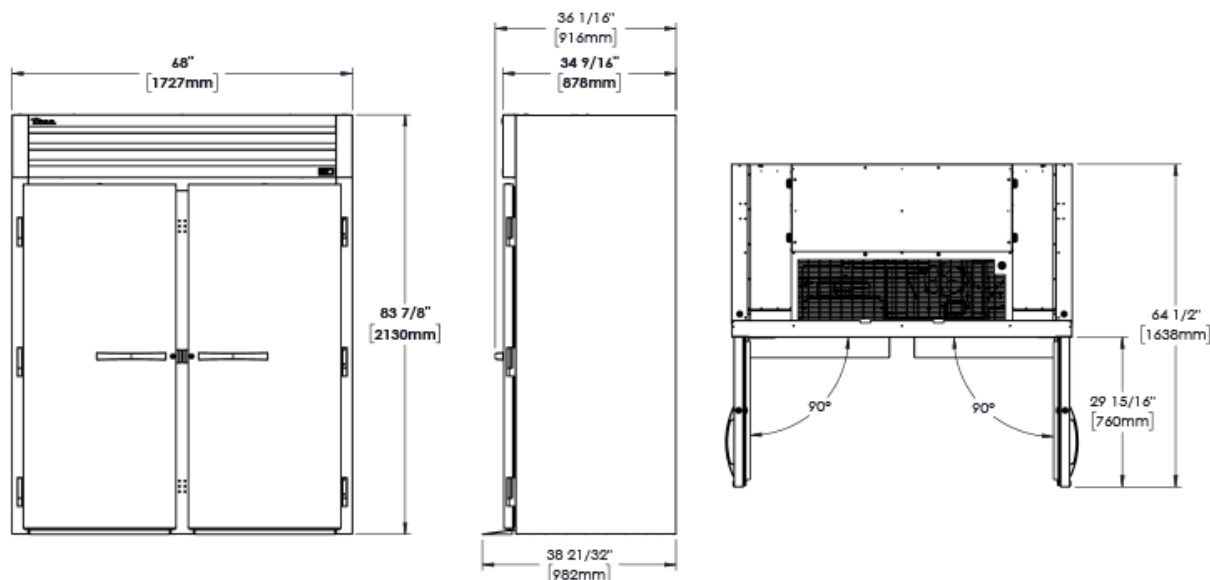

Specifications subject to change without notice.

Chart dimensions rounded up to the next whole millimeter (inches rounded up to the 1/8")

UK & Ireland
EMEA
Australia

0800 783 2049
[+41 61 563 07 05](tel:+41615630705)
[+61 2 9619 9999](tel:+61296199999)

TFIUK@truemfg.com
TrueCHCustomerService@truemfg.com
TrueRefAus@truemfg.com

true
REFRIGERATION