

## Upright Cabinets

# TGN-2R-2G

 2/1 GN Upright Reach-In Food Service Refrigerator, 2 Glass Swing Glass Doors



| Dimensions                               |                                                                              |
|------------------------------------------|------------------------------------------------------------------------------|
| External Width (mm)                      | 1463                                                                         |
| External Depth (mm)                      | 858                                                                          |
| External Height (mm)                     | 2079                                                                         |
| Exclusions                               | Depth does not include 44 mm for door handle or 12 mm for rear access panel. |
| Net Volume (Litres)                      | 882.5                                                                        |
| Gross Volume (Litres)                    | 1339                                                                         |
| Display Area (m <sup>2</sup> )           | 1.23                                                                         |
| Supplied Shelves                         | 6                                                                            |
| Shelf Size (L x D mm)                    | 530 x 650                                                                    |
| Internal Net Height (mm)                 | 1350                                                                         |
| Packaged Weight (kg)                     | 236                                                                          |
| Packaged Dimensions (W x D x H mm)       | 1600 x 991 x 2134                                                            |
| Internal Capacity for Keg (L x D x H mm) | 882.5                                                                        |
| Supplied with                            | Heavy duty lock-in-place ø 64 mm castors (83 mm height)                      |

| Build                 |                                                                                                 |
|-----------------------|-------------------------------------------------------------------------------------------------|
| Door Description      | 2 Full Glass Swing Door                                                                         |
| Exterior Construction | Stainless steel front with aluminum ends. Corrosion resistant GalFan coated steel back and top. |
| Interior Construction | Clear aluminum liner with stainless steel floor.                                                |
| Air Intake Position   | Front                                                                                           |
| Ventilation Position  | Rear                                                                                            |
| Clearance Required    | 26 mm rear, zero sides                                                                          |
| Cord Length (Meters)  | 3.05                                                                                            |
| Internal Lighting     | LED                                                                                             |
| Standard w/ Locks     | Standard                                                                                        |

| Technical                      |                                                                                                             |
|--------------------------------|-------------------------------------------------------------------------------------------------------------|
| Temperature Range              | 0.5 : 3.3°C                                                                                                 |
| Refrigerant                    | R290                                                                                                        |
| Voltage/Frequency/Phase        | 220-240V/50-60Hz/1                                                                                          |
| Amps                           | 0.65                                                                                                        |
| Watts                          | 511                                                                                                         |
| Climate Class                  | 5                                                                                                           |
| Operating Statement            | Tested at 25°C, 60% RH, per 'Refrigerators with a Direct Sales Function' for perishable food merchandising. |
| Test Standard                  | EN ISO 23953-2:2023                                                                                         |
| EEC                            | B                                                                                                           |
| Energy Efficiency Index        | 14.1                                                                                                        |
| Defrost Type                   | Auto                                                                                                        |
| Energy Consumption (kWh/24h)   | 3.6                                                                                                         |
| Energy Consumption (kWh/Annum) | 1316                                                                                                        |



Specifications subject to change without notice.

Chart dimensions rounded up to the next whole millimeter (inches rounded up to the 1/8")

UK & Ireland  
EMEA  
Australia


0800 783 2049  
[+61 61 563 07 05](tel:+61615630705)  
[+61 2 9619 9999](tel:+61296199999)

[TFIUK@truemfg.com](mailto:TFIUK@truemfg.com)  
[TrueCHCustomerService@truemfg.com](mailto:TrueCHCustomerService@truemfg.com)  
[TrueRefAus@truemfg.com](mailto:TrueRefAus@truemfg.com)



## TGN-2R-2G

 2/1 GN Upright Reach-In Food Service Refrigerator, 2 Glass Swing Glass Doors

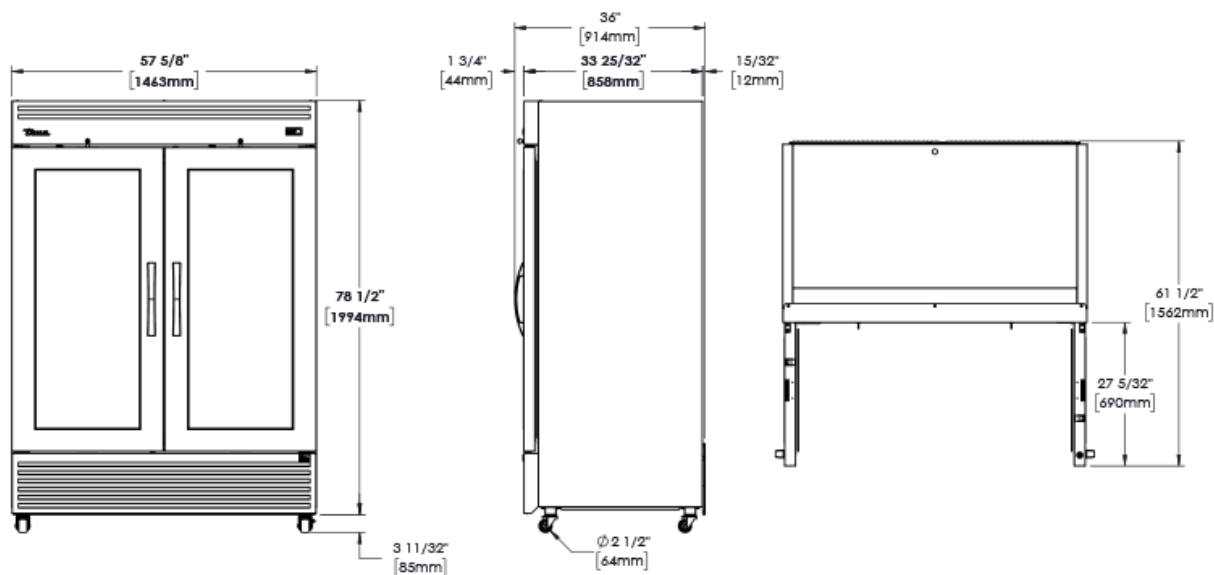

Specifications subject to change without notice.

Chart dimensions rounded up to the next whole millimeter (inches rounded up to the 1/8")

UK & Ireland  
EMEA  
Australia

0800 783 2049  
[+41 61 563 07 05](tel:+41615630705)  
[+61 2 9619 9999](tel:+61296199999)

[TFIUK@truemfg.com](mailto:TFIUK@truemfg.com)  
[TrueCHCustomerService@truemfg.com](mailto:TrueCHCustomerService@truemfg.com)  
[TrueRefAus@truemfg.com](mailto:TrueRefAus@truemfg.com)

**true**  
REFRIGERATION