

Upright Cabinets

TGN-1R-1G

 2/1 GN Upright Reach-In Food Service Refrigerator, 1 Glass Swing Glass Door



Dimensions		Build		Technical	
External Width (mm)	729	Door Description	1 Full Glass Swing Door	Temperature Range	0.5 : 3.3°C
External Depth (mm)	858	Door Opening	Right (standard) or Left Field Reversible	Refrigerant	R290
External Height (mm)	2079	Exterior Construction	Stainless steel front with aluminum ends. Corrosion resistant GalFan coated steel back and top.	Voltage/Frequency/Phase	220-240V/50-60Hz /1
Exclusions	Depth does not include 44 mm for door handle or 12 mm for rear access panel.	Interior Construction	Clear aluminum liner with stainless steel floor.	Amps	0.65
Net Volume (Litres)	435	Air Intake Position	Front	Watts	298
Gross Volume (Litres)	570	Ventilation Position	Rear	Climate Class	5
Display Area (m ²)	0.61	Clearance Required	26 mm rear, zero sides	Operating Statement	Tested at 25°C, 60% RH, per 'Refrigerators with a Direct Sales Function' for perishable food merchandising.
Supplied Shelves	3	Cord Length (Meters)	3.05	Test Standard	EN ISO 23953-2:2023
Shelf Size (L x D mm)	530 x 650	Internal Lighting	LED	EEC	A
Internal Net Height (mm)	1350	Standard w/ Locks	Standard	Energy Efficiency Index	8.8
Packaged Weight (kg)	152			Defrost Type	Auto
Packaged Dimensions (W x D x H mm)	1016 x 813 x 2134			Energy Consumption (kWh/24h)	1.64
Internal Capacity for Keg (L x D x H mm)	435			Energy Consumption (kWh/Annum)	599
Supplied with	Heavy duty lock-in-place ø 64 mm castors (83 mm height)				



Specifications subject to change without notice.

Chart dimensions rounded up to the next whole millimeter (inches rounded up to the 1/8")

UK & Ireland
EMEA
Australia


0800 783 2049
+41 61 563 07 05
+61 2 9619 9999

TFIUK@truemfg.com
TrueCHCustomerService@truemfg.com
TrueRefAus@truemfg.com



TGN-1R-1G

 2/1 GN Upright Reach-In Food Service Refrigerator, 1 Glass Swing Glass Door

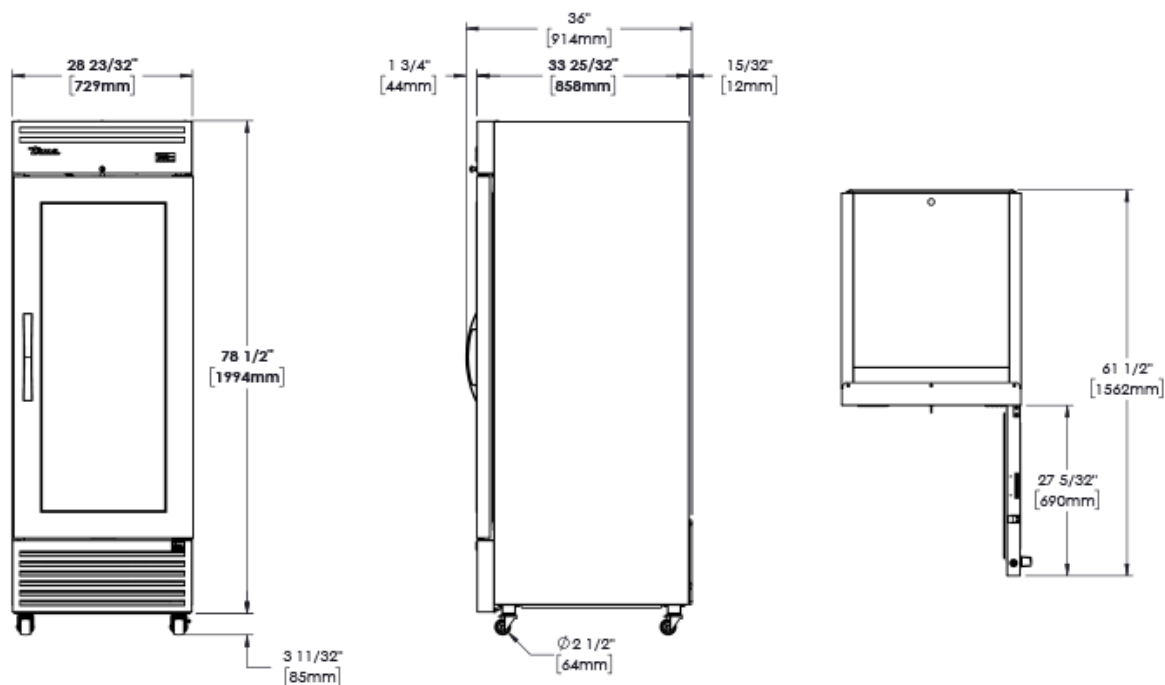

Specifications subject to change without notice.

Chart dimensions rounded up to the next whole millimeter (inches rounded up to the 1/8")

UK & Ireland
EMEA
Australia

0800 783 2049
+41 61 563 07 05
+61 2 9619 9999

TFIUK@truemfg.com
TrueCHCustomerService@truemfg.com
TrueRefAus@truemfg.com

true
REFRIGERATION