

Upright Cabinets

# T-35G-HC~FGD01

Upright Foodservice Refrigerator, 2 Full Glass Swing Doors



Dimensions	
External Width (mm)	1004
External Depth (mm)	750
External Height (mm)	2074
Exclusions	Depth does not include 35 mm for door handle or 13 mm for rear access panel.
Net Volume (Litres)	632
Gross Volume (Litres)	858
Display Area (m <sup>2</sup> )	0.91
Supplied Shelves	8
Shelf Size (L x D mm)	445 x 569
Internal Net Height (mm)	1300
Unpackaged Weight (kg)	177
Packaged Weight (kg)	191
Packaged Dimensions (W x D x H mm)	1156 x 902 x 2134
Supplied with	Heavy duty lock-in-place ø 64 mm castors (83 mm height)

Build	
Door Description	2 Full Glass Swing Doors
Exterior Construction	Stainless Steel Front with Aluminum Ends and GalFan Back and Top
Interior Construction	Clear Coated Aluminum Liner, Stainless Steel Floor with Coved Corners
Air Intake Position	Front
Ventilation Position	Rear
Clearance Required	26 mm rear, zero sides
Cord Length (Meters)	2.74
Internal Lighting	LED
Standard w/ Locks	Standard

Technical	
Temperature Range	0.5 : 3.3°C
Refrigerant	R290
Voltage/Frequency/Phase	220-240V/50-60Hz/1
Amps	2.2
Watts	528
Climate Class	3
Temperature Class	M1
Operating Statement	Tested at 25°C, 60% RH, per 'Refrigerators with a Direct Sales Function' for perishable food merchandising.
Test Standard	EN ISO 23953-2:2023
EEC	B
Energy Efficiency Index	13.9
Defrost Type	Auto
Energy Consumption (kWh/24h)	3.067
Energy Consumption (kWh/Annum)	1119



Specifications subject to change without notice.  
Chart dimensions rounded up to the next whole millimeter (inches rounded up to the 1/8")

UK & Ireland  
EMEA  
Australia


0800 783 2049  
+41 61 563 07 05  
+61 2 9619 9999

TFIUK@truemfg.com  
TrueCHCustomerService@truemfg.com  
TrueRefAus@truemfg.com



# T-35G-HC~FGD01

Upright Foodservice Refrigerator, 2 Full Glass Swing Doors

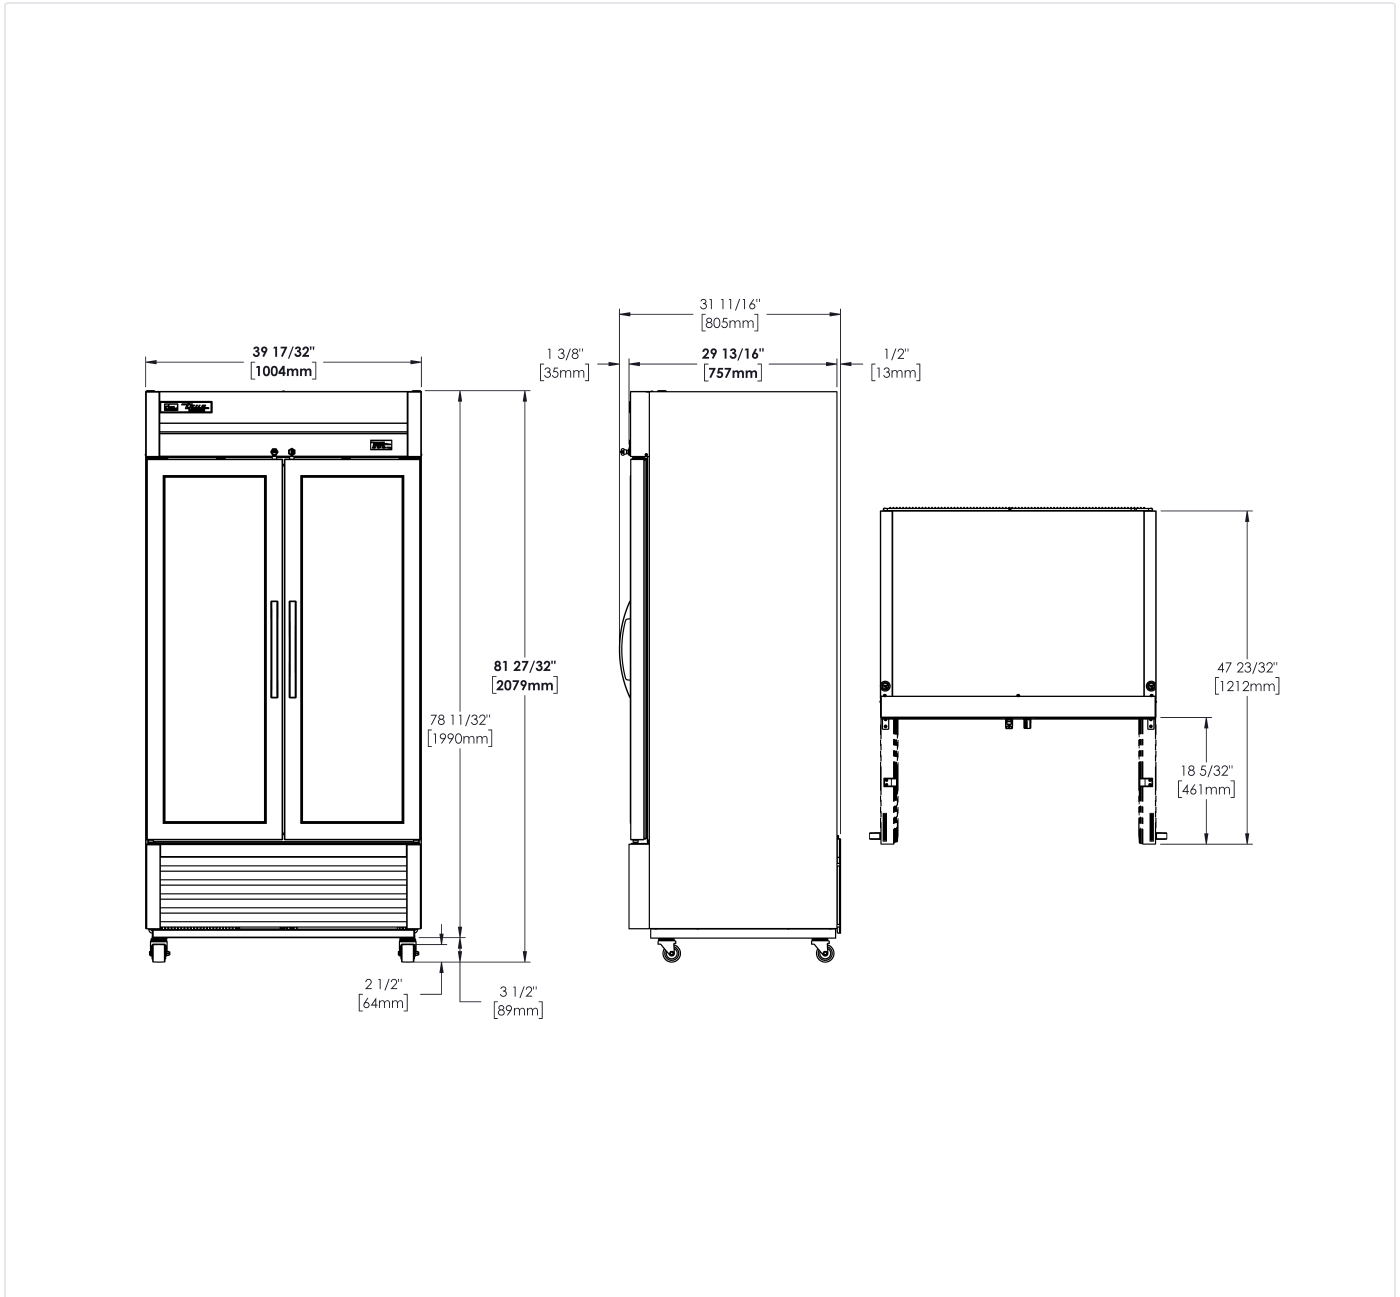

Specifications subject to change without notice.  
Chart dimensions rounded up to the next whole millimeter (inches rounded up to the 1/8")

UK & Ireland  
EMEA  
Australia

0800 783 2049  
+41 61 563 07 05  
+61 2 9619 9999

[TFIUK@truemfg.com](mailto:TFIUK@truemfg.com)  
[TrueCHCustomerService@truemfg.com](mailto:TrueCHCustomerService@truemfg.com)  
[TrueRefAus@truemfg.com](mailto:TrueRefAus@truemfg.com)

